


## MG-LED-048



### Specification:

- 1.LED Quantity:  
72pcs/108pcs 3030  
24pcs/36pcs 3535  
24pcs/36pcs 5050
- 2.Power:40W/60W/80W
- 3.Input Voltage:100-240V/277V
- 4.Frequency Range:50-60HZ
- 5.Power Factor: > 0.9
- 6.Color Temperature:2700-6500K
- 7.Color Rendering Index: > 70
- 8.LED Efficiency:100LM/W
- 9.Luminous Flux:4000LM/6000LM/8000LM
- 10.Work Temperature:-30°C-60°C
- 11.Installation pole dia:60/76MM
- 12.Material: Die casting Aluminum Alloy
- 13.Diffuser:Clear Tempered Glass
- 14.IP Rate: IP66
- 15.Humidity:10%-90%
- 16.LED Life: > 50000h

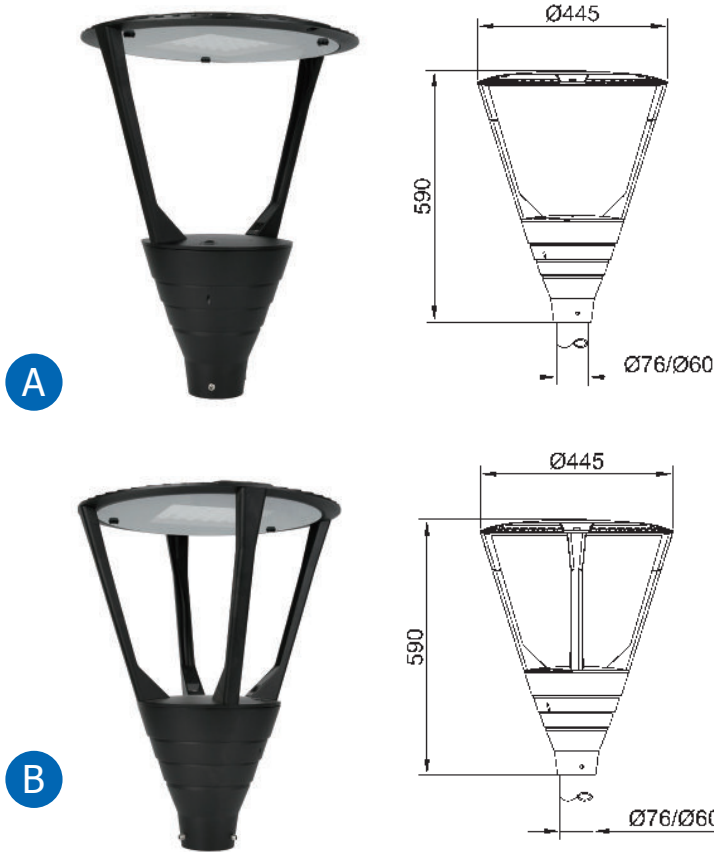