


MG-LED-049



Specification:

- 1.LED Quantity:63pcs 3030/24pcs 5050
- 2.Power:30W/50W/60W
- 3.Input Voltage:100-240V/277V
- 4.Frequency Range:50-60HZ
- 5.Power Factor: > 0.9
- 6.Color Temperature:2700-6500K
- 7.Color Rendering Index: > 70
- 8.LED Efficiency:120LM/W
- 9.Luminous Flux:3600LM/6000LM/7200LM
- 10.Work Temperature:-30°C-60°C
- 11.Installation pole dia:60MM
- 12.Material: Die casting Aluminum Alloy,
with casting aluminum alloy bracket
- 13.Diffuser:Clear Tempered Glass
- 14.IP Rate: IP65
- 15.Humidity:10%-90%
- 16.LED Life: > 50000h

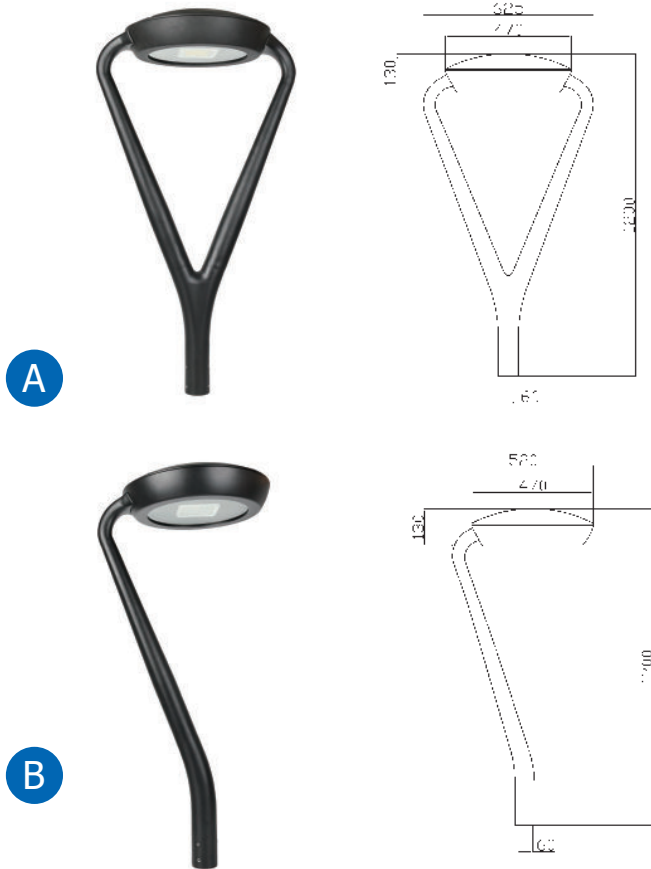