



## MG-LED-050D

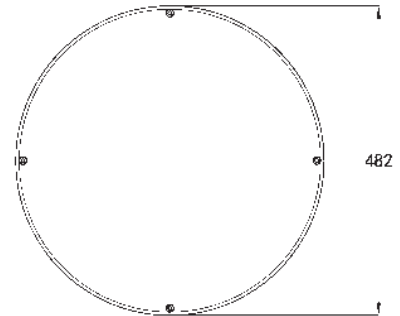

### Specification:

1.LED Quantity:72pcs/108pcs 3030	7.Color Rendering Index: > 70	12.Material: Die casting Aluminum Alloy
2.Power:30W/60W/90W	8.LED Efficiency:95LM/W	13.Diffuser:Clear Tempered Glass
3.Input Voltage:100-240V/277V	9.Luminous Flux:2850LM/5700LM	14.IP Rate: IP65
4.Frequency Range:50-60HZ	/8550LM	15.Humidity:10%-90%
5.Power Factor: > 0.9	10.Work Temperature:-30°C-60°C	16.LED Life: > 50000h
6.Color Temperature:2700-6500K	11.Installation pole dia:60MM	

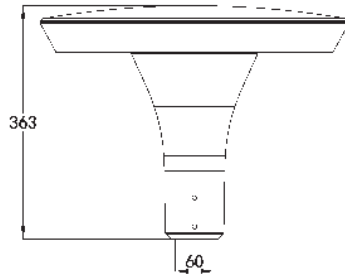