




Product information and test conditions

Name	KJ LED		
Time	2020-08-06 19:52:05(Time-zone GMT+8)		
Manufacturer	FONTES DE PARIS		
User	migdal-or lighting eng. (moti@migdal-or.org)		
Temperature(°C)	26	Humidity(%)	58
Distance(m)	0		

Parameters



CIE_x	0.4440
CIE_y	0.3943
CIE_u'	0.2595
CIE_v'	0.5185
CCT	2803 K
CRI (Ra)(R1~R8)	75
CQS	74
TLCI(Qa)	43
GAI	57
TM-30-18 Rf	73
TM-30-18 Rg	100
Illuminance	16,506 lux
Foot Candle	1,533.5 fc
λ_p	594 nm

Spectrum

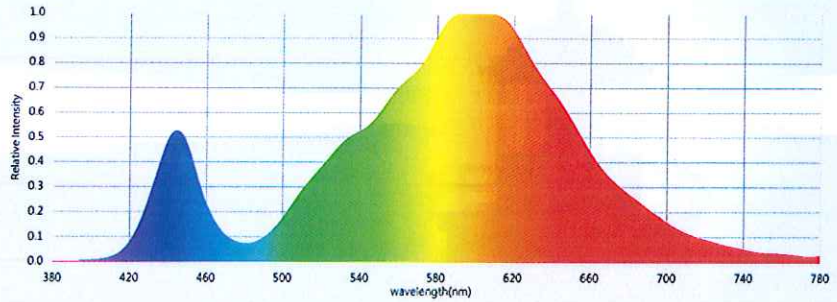


CRI (Re) (R1-R15)

Ra = 75 Re = 68

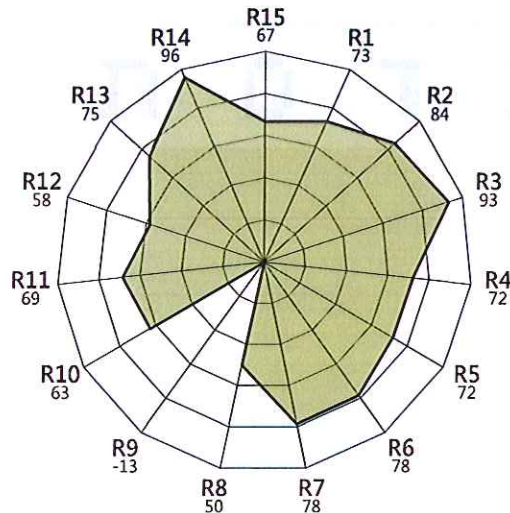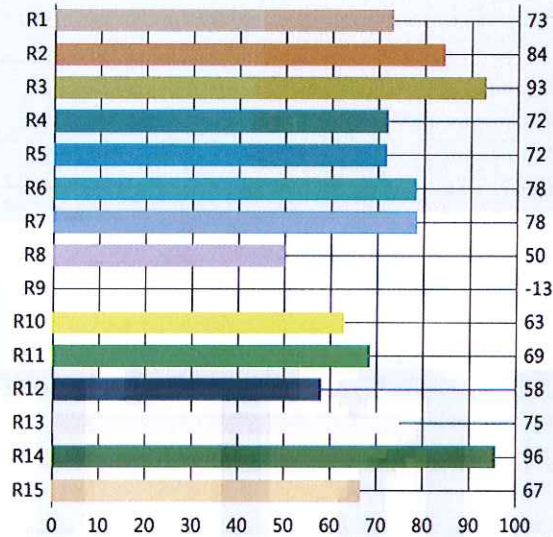


CIE 1931

x = 0.4440 , y = 0.3943 CCT = 2803K

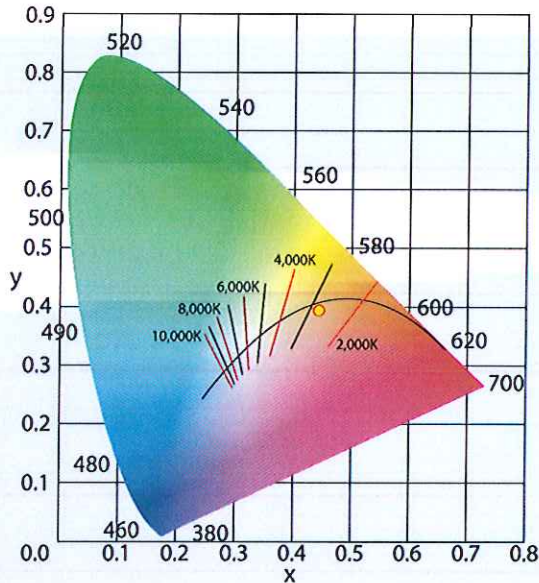


CIE 1976


x = 0.2595 , y = 0.5185 CCT = 2803K

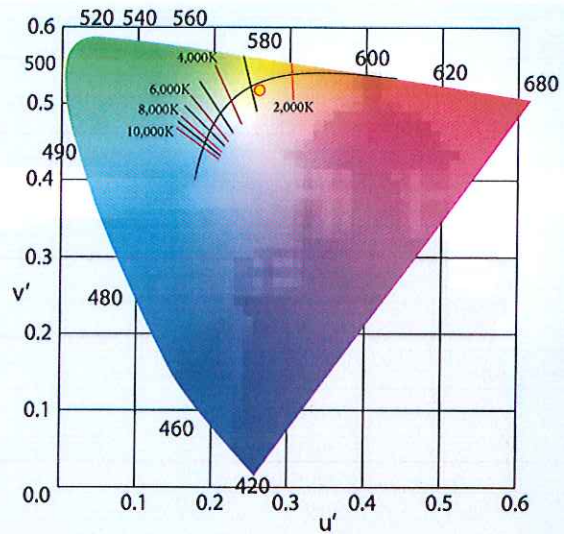

C78.377 - 2017

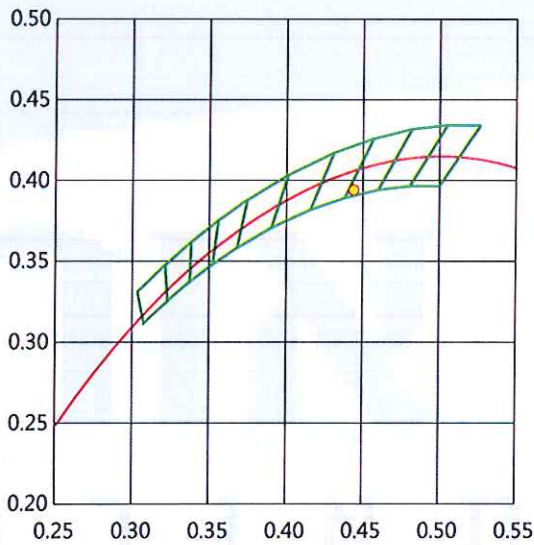

IEC-SDCM

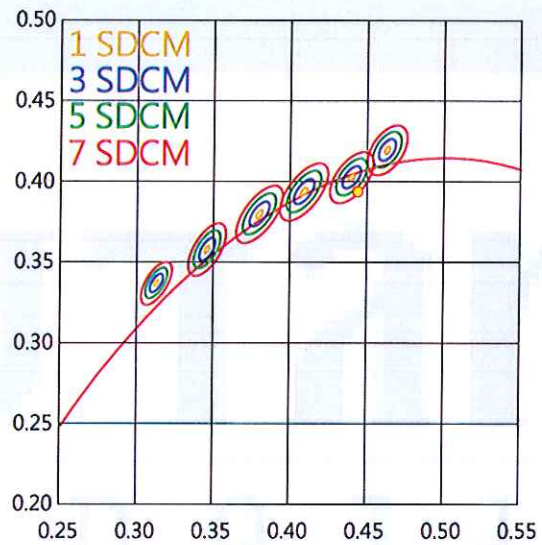

TM-30-18

Rf = 73 Rg = 100

