




Model 2018/19

EVO-BL-C

- >Wattage:10-30W
- >Luminous Flux:over 90LM/W
- >Beam angel:180,270,360 degree
- >Material:Aluminum and PC/TUV
- >Input Votage:AC100-277,50/60Hz
- >CIR>70,PF>0.9
- >CCT:2700-6000K
- >Working Temperature:-35~45 centigrade degree
- >Certificate:**IP65,CE,Rohs,ETL,cETL,DLC,cDLC,Patented**
- >Five years warranty
- >Laser customer logo:available
- >Package:EPE+Kraft paper box, 4PCS lamps in one carton
- >Bollard could be choose from 12inch 24inch 36inch 42inch,also available for customize
- >Finish:Black/White/Bronze/Grey,also could be customize

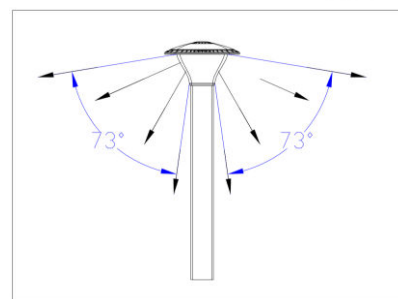

LIGHTING PATTERNS:



www.migdal-or.org


www.Migdal-or.org



Model 2018/19


Products Size

BOLLARD BOLT CIRCLE
UNIT: INCH/[MM]

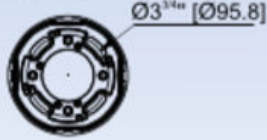

LED bollard with additional quality and strength of an aluminum pipe post. Optimal solution with round head. Available in 12, 24 and 36 inch versions that exceeds 180, 270 and 360 degree lighting patterns. Lamp socket with 8 pins, 12 inch, 24 inch, 36 inch and 42 inch. Products appearance with 4 or six pin code. Black, White, Grey and Bronze.

DIMENSIONS
UNIT: INCH/[MM]

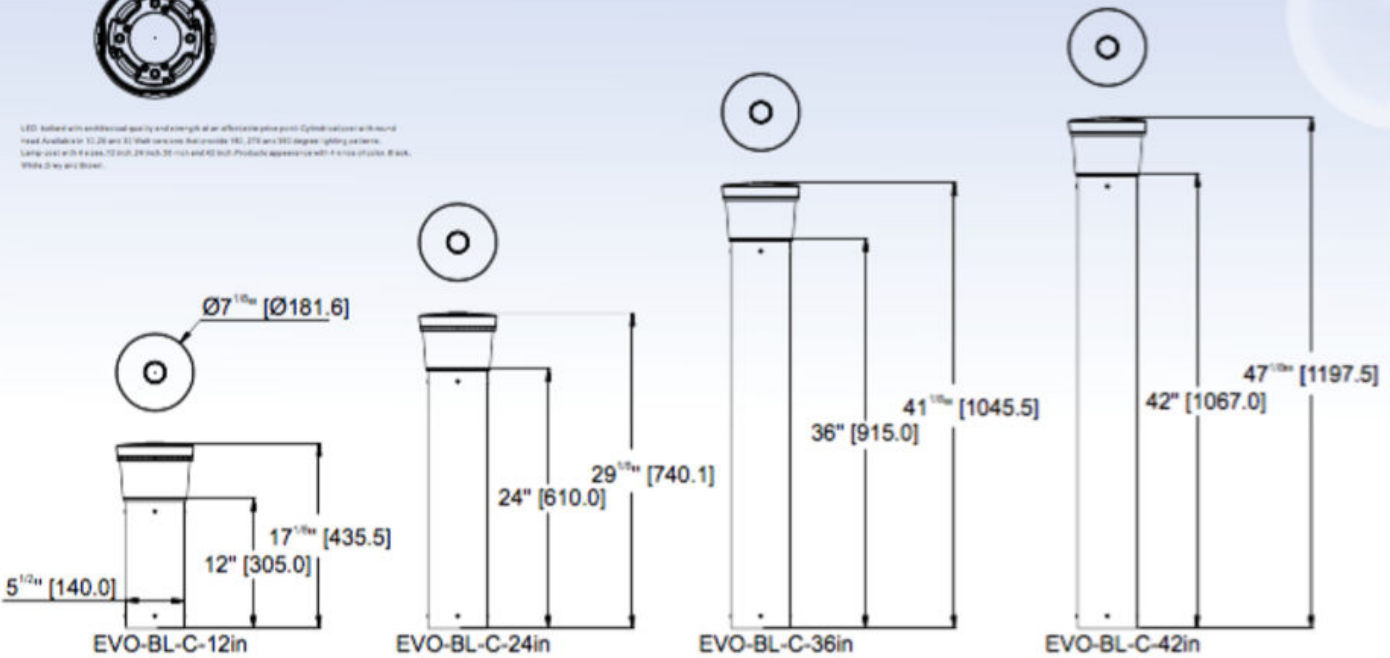

LIGHTING PATTERNS:




EVO-BL-C

www.Migdal-or.org




Model 2018/19

Installation Steps

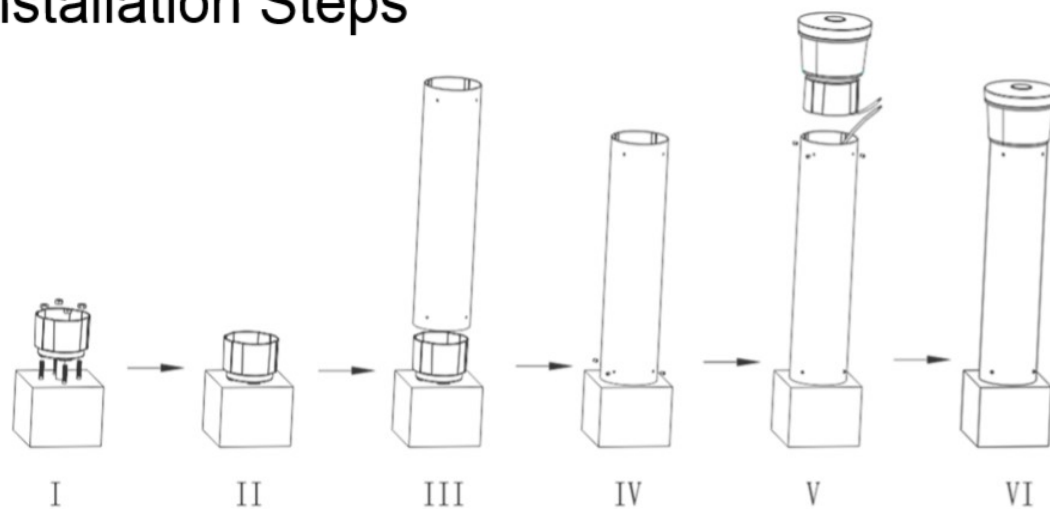

360 Degree and 180 Degree photo

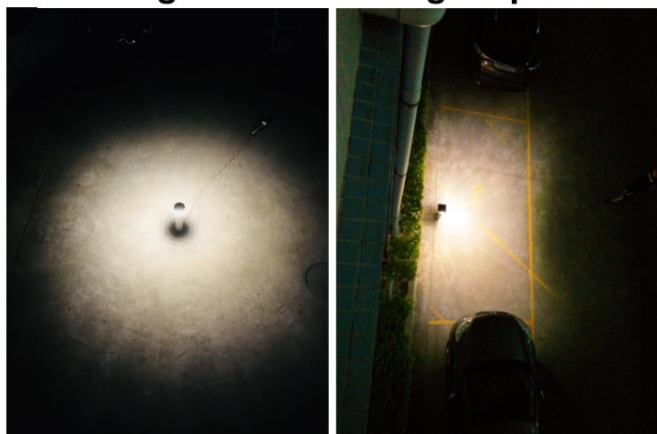

www.migdal-or.org

www.Migdal-or.org

EVO-BL-C

Migdal-or Lighting Eng. Tel.04-8525244 Fax. 04-8525245 office@Migdal-or.org