



PALERMO – S19

Modular Flood-light 75w



ENEC/CB/RCM/CE/FCC

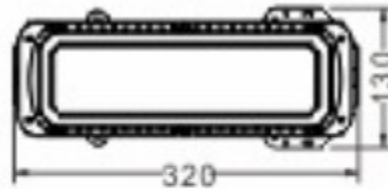

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°x25°, 130°x40°, 130°x60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



www.migdal-or.org

BEAM ANGLE



15°



25°



60°



90°



110°



130°x25°Asy



130°x40°Asy



130°x60°Asy





PALERMO – S19

Modular Flood-light 150w



ENEC/CB/RCM/CE/FCC

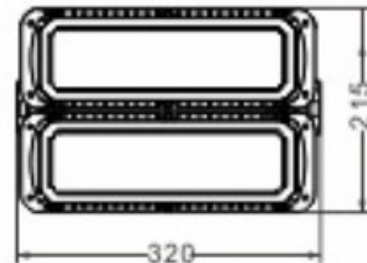

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°X25°, 130°X40°, 130°X60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



BEAM ANGLE



15°



25°



60°



90°



110°



130°x25°Asy



130°x40°Asy



130°x60°Asy





PALERMO – S19

Modular Flood-light 230w



ENEC/CB/RCM/CE/FCC

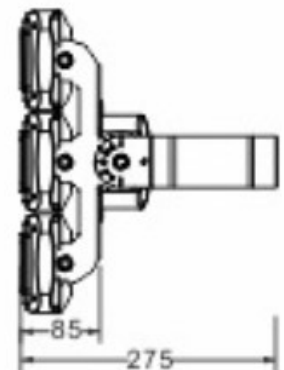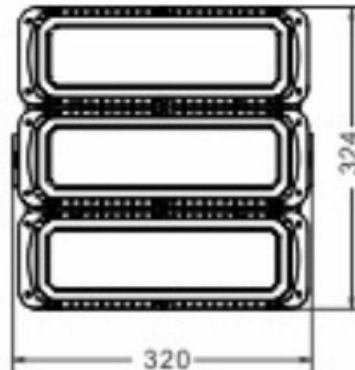

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°X25°, 130°X40°, 130°X60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



www.migdal-or.org

BEAM ANGLE



15°



25°



60°



90°



110°



130°x25°Asy



130°x40°Asy



130°x60°Asy





PALERMO – S19

Modular Flood-light 300w



ENEC/CB/RCM/CE/FCC

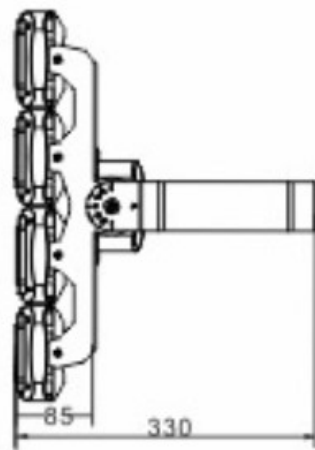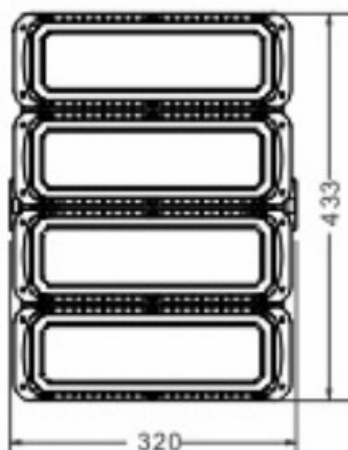

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°X25°, 130°X40°, 130°X60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



www.migdal-or.org

BEAM ANGLE



15°



25°



60°



90°



110°



130°x25°Asy



130°x40°Asy



130°x60°Asy





PALERMO – S19

Modular Flood-light 450w



ENEC/CB/RCM/CE/FCC

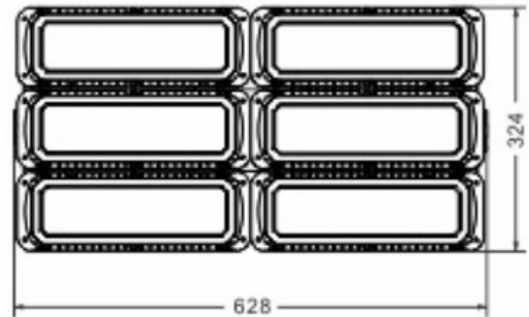

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°X25°, 130°X40°, 130°X60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



www.migdal-or.org

BEAM ANGLE



15°



25°



60°



90°



110°



130°X25°Asy



130°X40°Asy



130°X60°Asy




PALERMO – S19

Modular Flood-light 600w



ENEC/CB/RCM/CE/FCC

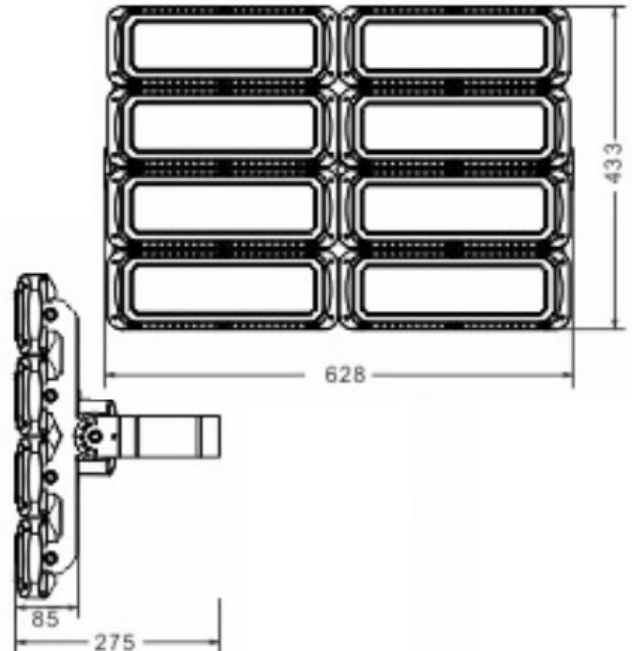

Main Features

- **Power Range** from 75W to 1200W
- **Lumileds LEDs 3030 & 5050** up to 155lm/w@80Ra
- **Different beam angle:** 15°, 25°, 60°, 90°, 110°, 130°X25°, 130°X40°, 130°X60°, Asymmetric
- **Driver:** Meanwell
- **Die-casting:** Aluminum housing with AkzoNobel power coating
- **Communication:** Dali, 1-10V, Dimmable available
- **Lifetime:** 97,000 hrs



BEAM ANGLE



15°



25°



60°



90°



110°



130°x25°Asy



130°x40°Asy



130°x60°Asy

