

Decorative Lighting

URBINO LED Globe




Benefit from...

Low power consumption - **Reduced energy bills**

Long life, reduced maintenance - **Lower running costs**

Excellent colour rendering - **Improved safety**

Easy access driver - **simplified/lower cost maintenance**

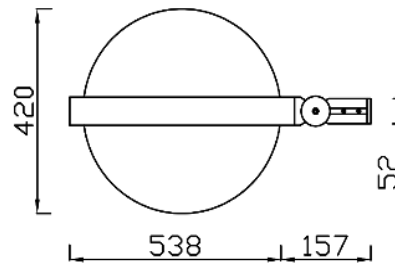

Output (actual)

TOTAL GLOBE Power (W)	Luminaire Output (Lm)
50	7200
95	14000

**PHILIPS
LUMILEDS**



- Car parks
- Private street areas
- Bridges, footpaths and walkways Stadia
- Amenity areas

Not sure which amenity lighting solution is right for your needs?
Give us a call to discuss your requirements.



www.migdal-or.org

Specifications

Colour Temperature	Cool White 3000K- 6500K
Efficacy	up to 144lm/W
Colour Rendering Index	>70Ra
Voltage	100-240Vac 50/60Hz
Markings	CE
LED	LUMILEDS 5050
Diffuser	Opal PC diffuser
Power factor	>0.9
Driver	Philips or Meanwell
Colour	Gray
Dimensions (body)	502mm diameter
Mounting	V60 standard
Materials	Gray/clear pc
Weight	50w-8.7kg, 95w-9.4kg
Sealing	IP65
Ambient temp	-25°C to +40°C
Material	Die casting aluminum

Rev 001