



A

## VARESE Series

A flexible solution as a reflection roles of nature!



B

C




The VARESE Series is a flexible product with variety of mounting configurations, optic distributions & lumen packages. It can use for Parking areas to Pedestrian pathways.

The flexibility of a single post top or Twin mount arm allows the product to scale to landscapes or urban environments accordingly.

Decorative tapered aluminum poles are also available to complement the VARESE.

VISIT OUR WEBSITE. [WWW.MIGDAL-OR.ORG](http://WWW.MIGDAL-OR.ORG) to learn more about our products

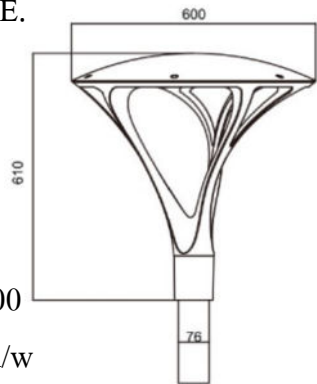

## Technical specifications

Optic Distributions: Type II, III, IV, V, Asymmetric

Wattage: 30w, 50w, 70w, 100w

CCT/CRI: 3000K/70 CRI, 4000K/80

Controls: 0-10V, 7-pin photocontrol receptacle

Power factor, >0.9

Total harmonic distortion: <20%

Ambient temperature rating: 40°C (optional 50°C)

Lumens: 3,300 - 11,000

Efficacy: Up to 120lm/w


IP66 IK09 RG-0

LED driver: Meanwell, Philips

LED: Philips Lumiled 3030, 5050

Temperature: -30°C

Operation: 120-277V 50/60Hz

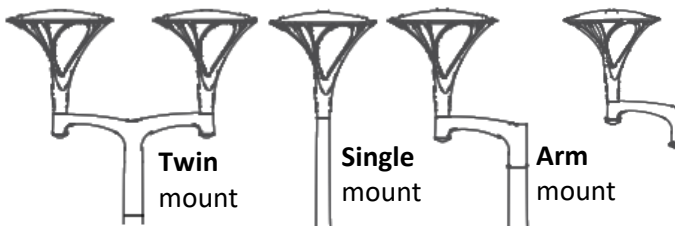

Twin mount

Single mount

Arm mount

Wall mount

### Color



Black



Dark gray



Light gray

MIGDAL-OR LIGHTING ENG.  
TEL: 04-8525244 FAX: 04-8525245



E-mail: [office@Migdal-or.org](mailto:office@Migdal-or.org)  
Web site: [www.Migdal-or.org](http://www.Migdal-or.org)

