

CORAL

Led Urban light series





LONG USEFUL OPERATING LIFE

Joliet products use the world's most reputable LED manufacturers and the latest available standards to adequately report lumen maintenance. We strive to drive LEDs under their nominal current and use state-of-the-art heat dissipation methods, leading to durable electronics.



VIBRANT CCT & COLOR BINNING CONSISTENCY

All products are offered in various colour temperatures, and manufactured using tighter bins, ensuring excellent consistency and uniformity.



5 YEARS WARRANTY

Joliet Luminaires are covered by a solid comprehensible manufacturer's warranty that covers a range of possible defects and performance parameters throughout the duration of the warranty period.



PROUDLY MADE IN CHINA

Our products are designed and manufactured in China. Engineered to perfection, using only the highest quality components and highly skilled labour, each luminaire is assembled and thoroughly tested, to ensure that it exceeds the highest standards.



WCTAR A LCD Urban light Specification

CERTIFICATE



PRODUCT SPECIFICATION

Item	CORAL					
	30W	40W	50W	60W	80W	100W
Power	30W	40W	50W	60W	80W	100W
Efficiency	>100lm/w					
Lumen output	≥3000lm	≥4000lm	≥5000lm	≥6000lm	≥8000lm	≥10000lm
Led chips	Philips Lumileds 3030					
CRI	>90					
Life span	60,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PMMA Cover					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	CLASS I					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	● RAL 7035		● RAL7024 (others upon request)			
IP Rating	IP66					
IK Rating	IK08					
Working Temperature	30°C -- 1 65°C					
Warranty	5 years					

WETAR A





WETAR A LED Urban light Specification


CERTIFICATE



PRODUCT SPECIFICATION

Item	CORAL					
Power	30W	40W	50W	60W	80W	100W
Efficiency	>100lm/w					
Lumen output	≥3000lm	≥4000lm	≥5000lm	≥6000lm	≥8000lm	≥10000lm
Led chips	Philips lumileds 3030					
CRI	>80					
Life span	50,000hrs at Ta=25deg, L70/B10					
Color Temperature	2700K-6500K					
Optic lens	PMMA Cover					
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)					
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz					
Power factor	>95%					
THD	<10%					
Protection level	CLASS I					
SPD	10KV (optional 20KV or other)					
Housing	aluminum by die-casting					
Finish	powder coating					
Housing color	●RAL 7035		●RAL7024 (others upon request)			
IP Rating	IP66					
IK Rating	IK08					
Working Temperature	-30°C ~ + 65°C					
Warranty	5 years					

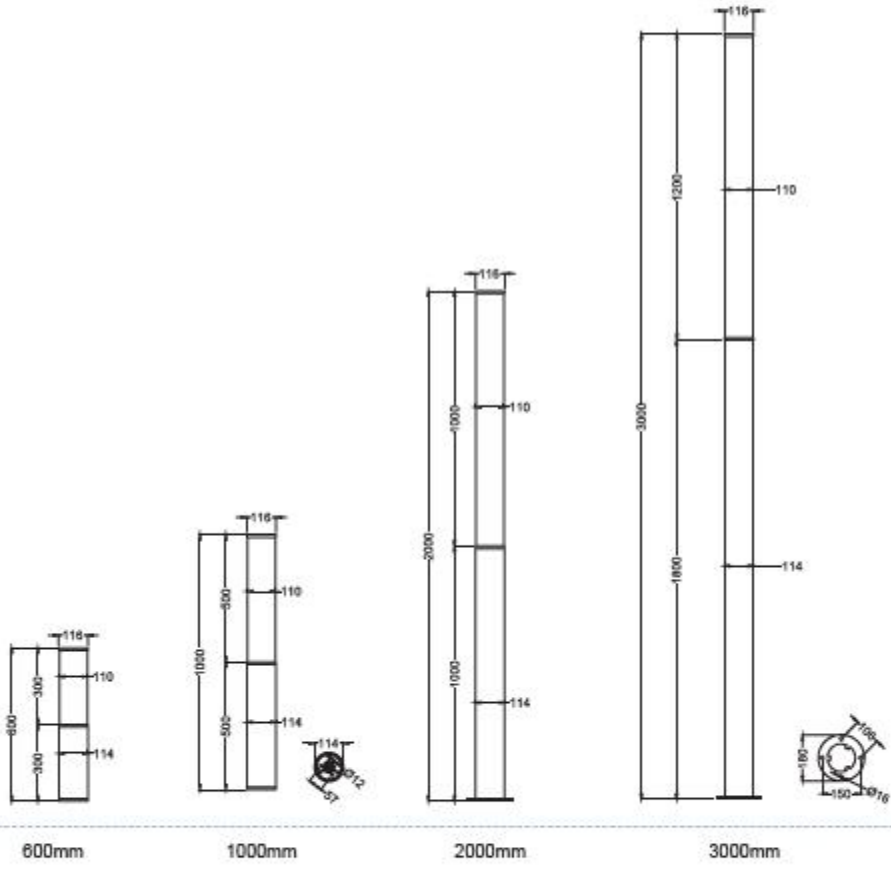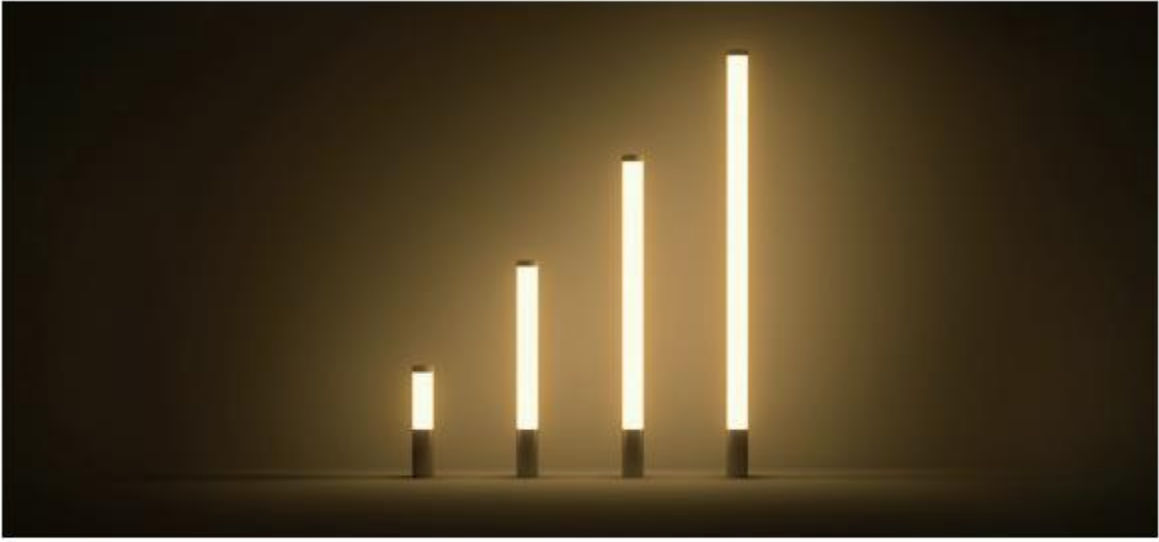



CREATE
DISTINCTIVE
EFFECTS

Available in a range of heights and colour temperatures, this striking marker light can provide the sculptural effect and atmosphere you choose, punctuating outdoor spaces with a seamless warm glow or pillars of clear white.



360°
ILLUMINATION

Coral provides uniform illumination in 360 degrees. A bold feature alone or arranged in combination. It is a vibrant colourful beacon that adds presence to urban spaces such as streets, roads and public areas, marking these spaces with a prominent display of light.

