


Migdal-or Lighting Eng.
SPOLETO-20 series

led flood light is a state-of-the-art luminaries that includes the latest advances of led technology, complemented by a simply, yet elegant ergonomic design. Wide use for Bar, restaurant, clubs, hotels, stages, Historical and modern buildings, Museum, art galleries, Sculptures and plastic arts.

LED TYPE

SMD3030 or SMD5050 or CREE

SPOLETO20-200

330*414*78mm 150W 200W

SPOLETO20-400


431*525*79mm 300W 400W

SPOLETO20-600






567*643*79mm 500W 600W

SPOLETO20-1000

668*724*79mm 800W 1000W

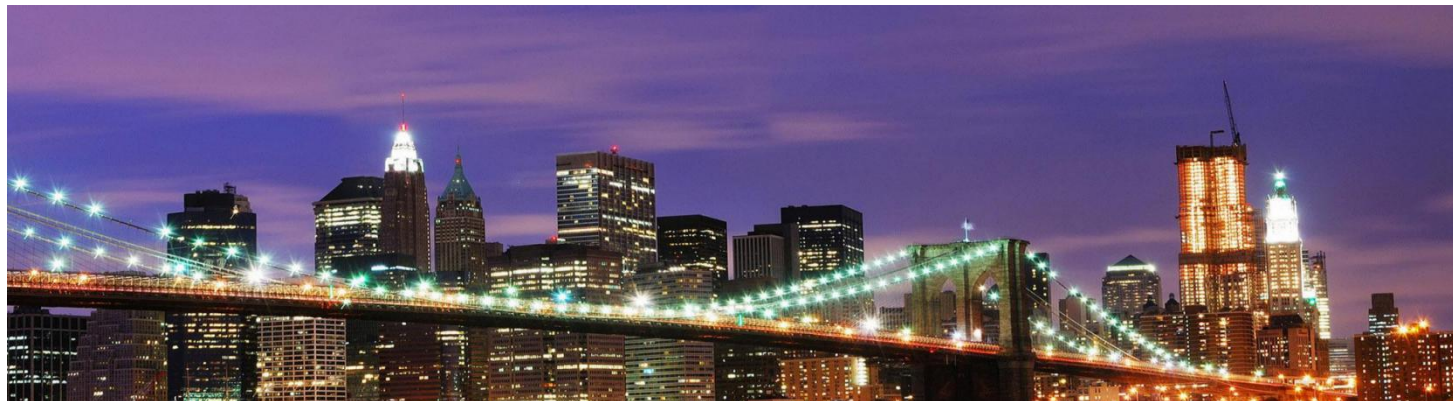

Light Housing Size Options



SPOLETO20-200

150W 200W

Size: 330*414*78mm

SPOLETO20-400

300W 400W

Size: 431*525*79mm

SPOLETO20-600

500W 600W

Size: 567*643*79mm



SPOLETO20-1000

800W 1000W


Size: 668*724*79mm

Light Distribution Options



30degree




60degree






90degree



More Options

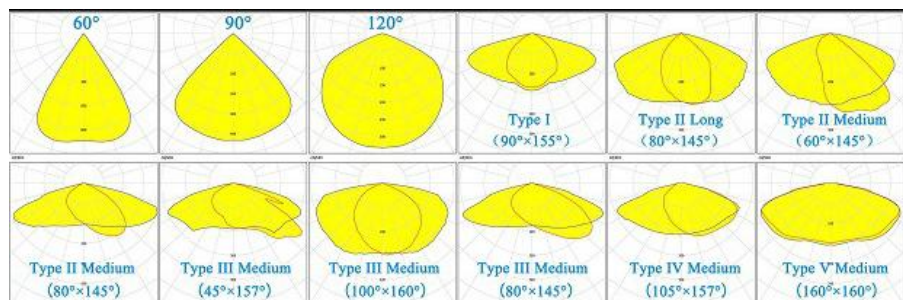

Light Pictures

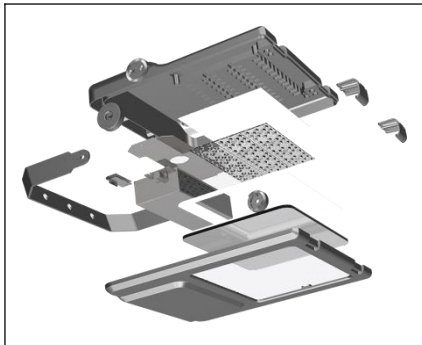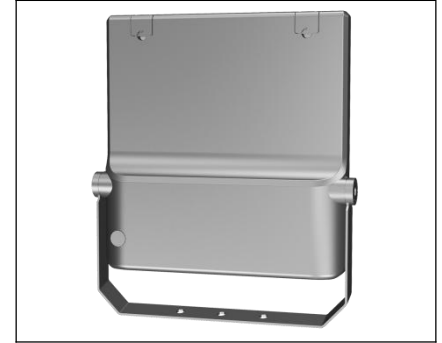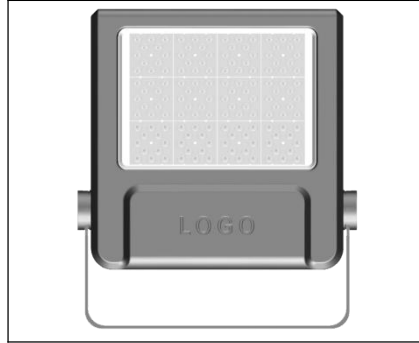

LM-FL59R



LM-FL59R



Applications



Project In Ningbo



Project In Canada



Project In Spain



SPOLETO-20

LED FLOOD LIGHT

CE RoHS IP66 IK09

Light Data-Sheet

Model No	SPOLETO20-200		SPOLETO20-400		SPOLETO20-600		SPOLETO20-1000	
Size	330*414*78mm		431*525*79mm		567*643*79mm		668*724*79mm	
Watts	150W	200W	300W	400W	500W	600W	800W	1000W
Luminous	115-150lm/W		115-150lm/W		115-150lm/W		115-150lm/W	
LED Qty	192pcs SMD3030 288pcs SMD3030		384pcs SMD3030 576pcs SMD3030		640pcs SMD3030 960pcs SMD3030		960pcs SMD3030 1440pcs SMD3030	
Material	Aluminum, LED Chip, Lens, Toughened Glass, Screw							
CCT: (Kelvin)	3000K, 4000K, 5000K, 6000K or Specified Color							
LED option	SMD3030, SMD5050, CREE (Note: normal are SMD3030 chip)							
CRI	90Ra, 80Ra, 75Ra, 70Ra (Note: normal are 75Ra)							
Lens Angle	17, 30, 60, 90, 150*75, Type III, Type II							
Driver option	Sosen, Inventronics, Meanwell or Specified brand (Note: normal are Sosen or Meanwell driver)							
Input Voltage	100-277Vac (Sosen), 110-240Vac (Meanwell ELG), 90-305Vac (Meanwell HLG); 50/60Hz; PF>0.95							
Lifetime	>100.000 hours							
IP Level	IP66							
Lighting Way	AC Normal Lighting, AC Dimming Lighting, Solar Lighting, Photocell							
Certificate	CB, CE, RoHS, IP66, IK09 etc.							
Package	SPOLETO20-200 150-200W		SPOLETO20-400 300-400W		SPOLETO20-600 500-600W		SPOLETO20-1000 800-1000W	

More information, please contact our sales directly.