

VARESE-A

Led Urban light series







VARESE-A as a new garden light series design, reflects the role of nature and the .
desire to stay connected with a more organic urban environment

It relates to the pedestrian experience across an entire campus setting with a visually
uniform family of products designed to enhance architectural applications.

Can provide suitable light distribution scheme according to different usage scenarios,

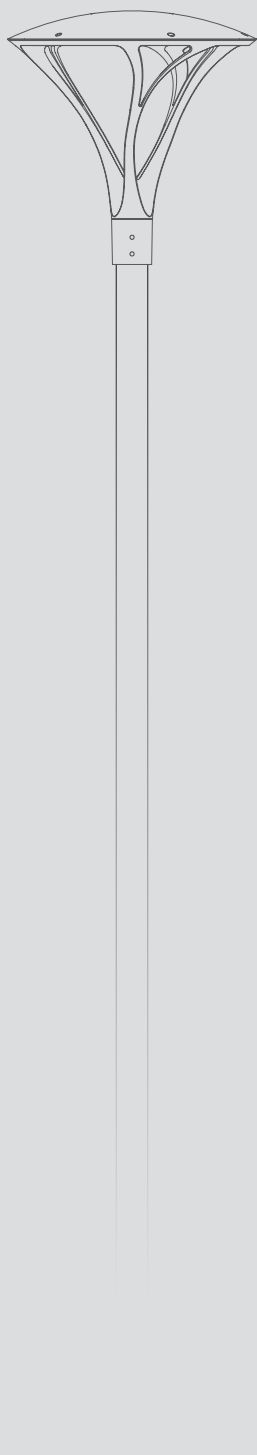


CERTIFICATE




PRODUCT SPECIFICATION

Item	VARESE- A / VARESE A-MINI			
Power	30W	50w	70w	100w
Efficiency	PC:>100lm/w		Glass:>140lm/w	
Lumen output	≥3000lm ≥4200lm	≥5000lm ≥7000lm	≥7000lm ≥9800lm	≥10000lm ≥14000lm
Led chips	Philips lumileds 3030			
CRI	>80			
Life span	50,000hrs at Ta=25deg, L70/B10			
Color Temperature	2700K-6500K			
Optic lens	PC Lenses			
Driver	Philips Xi-EP series (Meanwell/Inventronic/Osram upon request)			
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz			
Power factor	>95%			
THD	<10%			
Protection level	CLASS I			
SPD	10KV (optional 20KV or other)			
Housing	aluminum by die-casting			
Finish	powder coating			
Housing color	● RAL 7035 ● RAL7024 (others upon request)			
IP Rating	IP66			
IK Rating	IK10			
Working Temperature	-30°C ~ + 65°C			
Warranty	5 years			
Warranty	5 years			



VARESE A-MINI

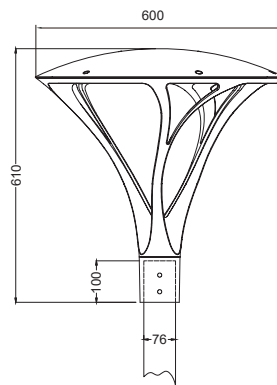

VARESE A

APPLICATIONS



BUILDING
SURROUNDS



PARKS,
PROMENADES &
PATHWAYS








PEDESTRIAN
AREAS & CYCLE
PATHS




URBAN &
RESIDENTIAL
STREETS



VARESE- A / VARESE A-MINI

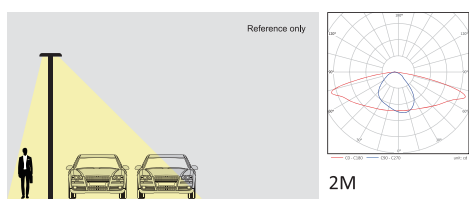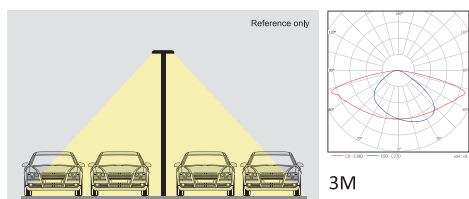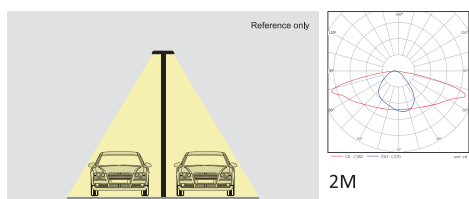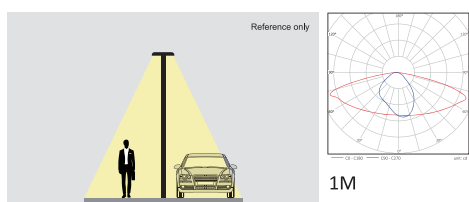

Large wall mount
[10-18 ft. Mounting heights]

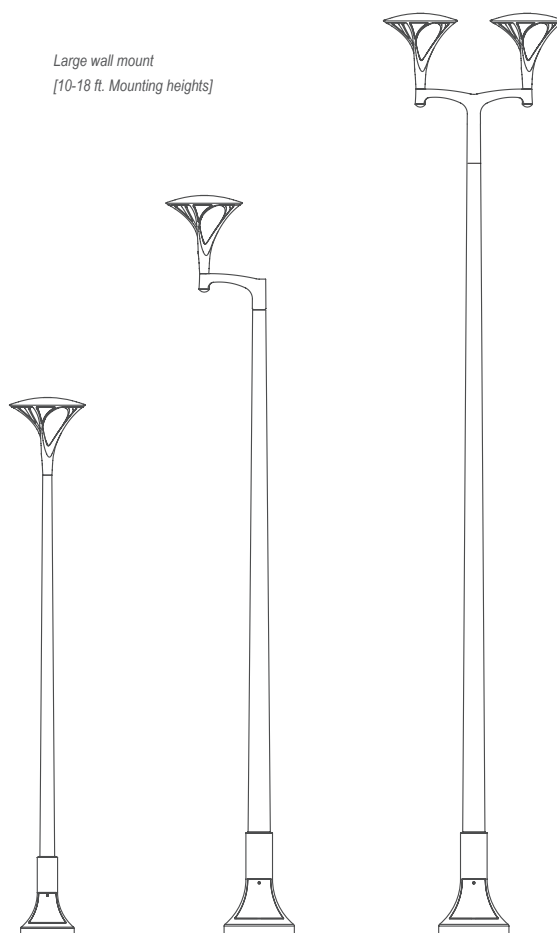

Single post top
[10-18 ft. Mounting heights]

Single arm post top
[18-22 ft. Mounting heights]

Twin arm post top
[18-30 ft. Mounting heights]