


# VARESE-B

*Led Urban light series*



Migdal-or Lighting Eng.  
Tel. 04-8525244  
Fax. 04-8525245  
Office@migdal-or.org  
www.migdal-or.org

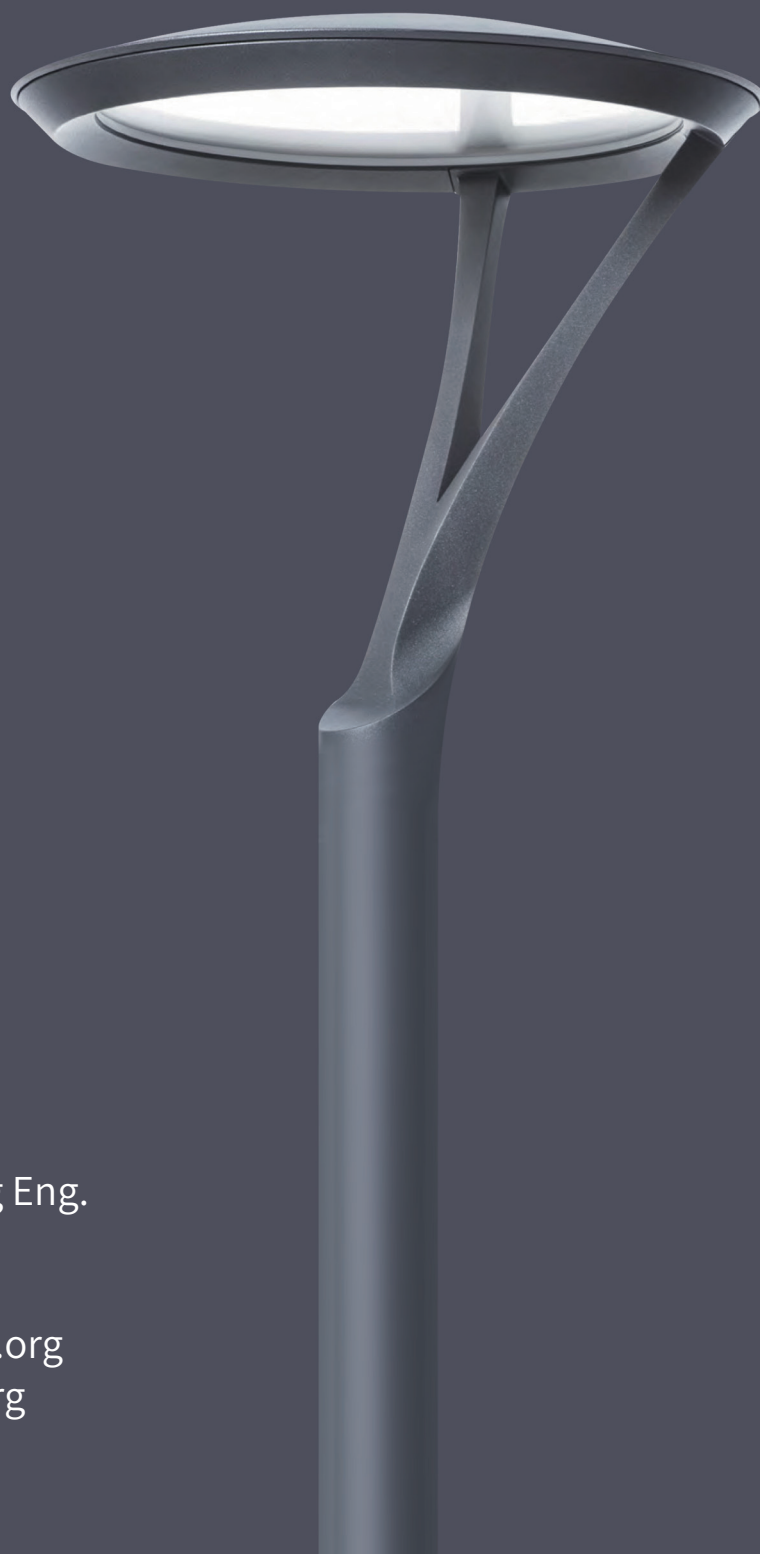

VARESE-B as a new garden light series design, reflects the role of nature and the .  
desire to stay connected with a more organic urban environment

It relates to the pedestrian experience across an entire campus setting with a visually  
uniform family of products designed to enhance architectural applications.

Can provide suitable light distribution scheme according to different usage scenarios,

#### APPLICATIONS



BUILDING  
SURROUNDS



PARKS,  
PROMENADES &  
PATHWAYS




PEDESTRIAN  
AREAS & CYCLE  
PATHS











URBAN &  
RESIDENTIAL  
STREETS

## CERTIFICATE



## PRODUCT SPECIFICATION

Item	VARESE-B			
Power	30W	50w	70w	100w
Efficiency	PC:>100lm/w		Glass:>140lm/w	
Lumen output	≥3000lm ≥4200lm	≥5000lm ≥7000lm	≥7000lm ≥9800lm	≥10000lm ≥14000lm
Led chips	Philips lumileds 3030			
CRI	>80			
Life span	50,000hrs at Ta=25deg, L70/B10			
Color Temperature	2700K-6500K			
Optic lens	PC Lenses			
Driver	Philips Xi-EP series ( Meanwell/Inventronic/Osram upon request )			
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz			
Power factor	>95%			
THD	<10%			
Protection level	CLASS I			
SPD	10KV (optional 20KV or other)			
Housing	aluminum by die-casting			
Finish	powder coating			
Housing color	● RAL 7035    ● RAL7024 ( others upon request )			
IP Rating	IP66			
IK Rating	IK10			
Working Temperature	-30°C ~ + 65°C			
Warranty	5 years			
Warranty	5 years			

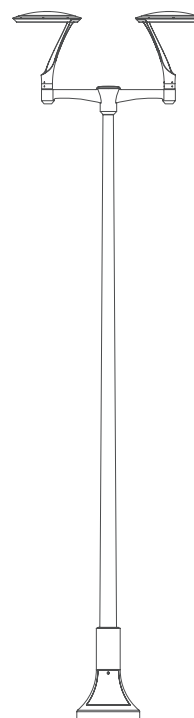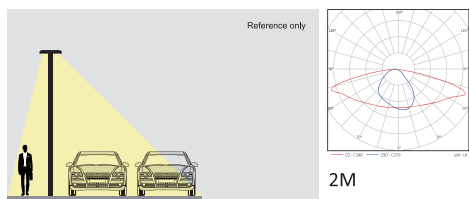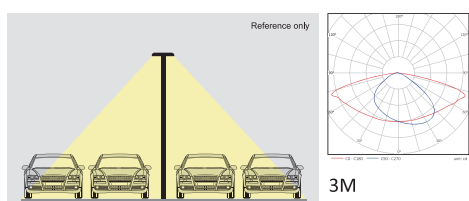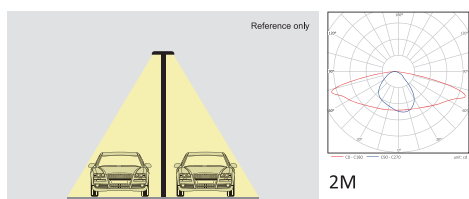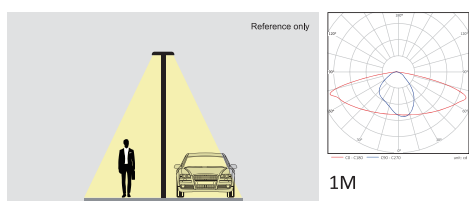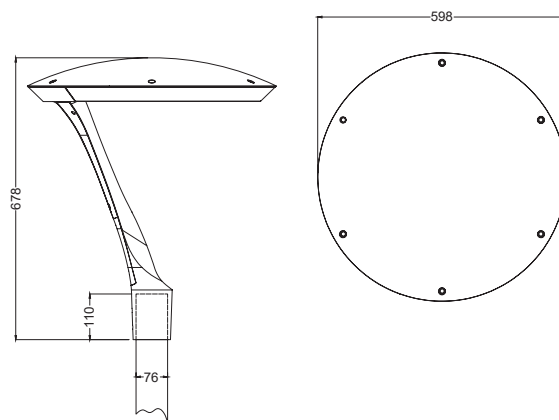

Wall mount arm  
8-10 ft. Mounting heights  
(Spider / Cantilever mount only)

Single post top  
10-18 ft. Mounting heights  
(Spider / Cantilever mount only)

Twin mount arm  
18-22 ft. Mounting heights  
(Spider / Cantilever mount only)

