




VARESE-L

LED Bollard light series

Migdal-or Lighting Eng. Tel. 04-8525244 Fax. 04-8525245 Office@migdal-or.org www.migdal-or.org

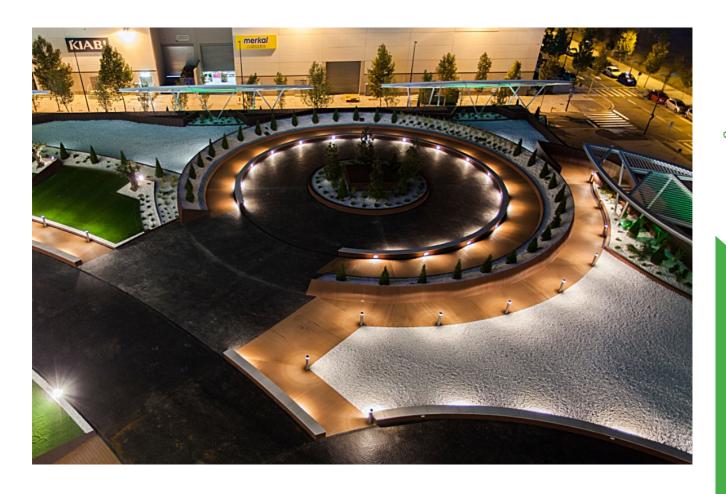

VARESE-L as a led bollard, it belongs to the VARESE family of products Integrating into the environment, maintaining architectural consistency, and being in line with nature are the biggest design features of this product series As a lawn lamp, VARESE-L perfectly interprets this design concept

APPLICATIONS



PARKS, PROMENADES & PATHWAYS



PEDESTRIAN AREAS & CYCLE PATHS



URBAN & RESIDENTIAL STREETS



VARESE-L LED Bollard light Specification



CE CB & RoHS











PRODUCT SPECIFICATION -----

Item	VARESE-L			
Power	20W	30W	40W	
Efficiency	>140lm/w			
Lumen output	≥2800lm	≥4200lm	≥5600lm	
Led chips		Philips lumileds 3030		
CRI	>80			
Life span	60,000hrs at Ta=25deg, L70/B10			
Color Temperature	2700K-6500K			
Optic lens	PC Lenses			
Driver	Philips Xi-EP series (others upon request)			
Input Voltage	100~305 VAC (Depending on driver model) 47~63 Hz			
Power factor	>95%			
THD	<10%			
Protection level	CLASS I			
SPD	10KV (optional 20KV or other)			
Housing	aluminum by die-casting			
Finish	powder coating			
Housing color	● RAL 7035 ● RAL 7024 (others upon request)			
IP Rating	IP66			
IK Rating	IK09			
Working Temperature	-30°C ~+ 65°C			
Warranty	5 years			



