

VERONA 2020

UGR < 19
IK 10

Redefine
Anti-Glaring

130lm/w

5 YEARS
WARRANTY

Meanwell
Driver

CREE
LED



RoHS
compliant



LM 79

LM 80

TM 21

Features




Housing: Pure Aluminum
Thermal Conductivity: 226 W/m·K
Led: CREE JK 3030
CRI: Ra>70 (80/90 for option)
SDCM: <6
Power Factor: >0.95
THD: <15
Driver: Meanwell ELG
Driver Efficiency: >93%
Protection: OTP, OCP, OVP, SCP
Surge Protection: 6KV
Waterproof: IP65
Impact Test: IK10
Electrical: 100-277V, 50/60Hz
Operating Temperature: -40~50°C
Tm21: L90B10>50,000H
Lifetime: 50,000H

Functions

ZigBee · PWM · DALI · 0/1~10V · Micro-wave



Optical options

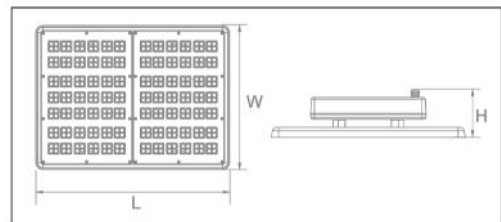

Model	Watt	Voltage	Lumen	CRI	IP	Dimension
VERONA 2020	60W	100~277V	7800LM	>70 (80)	IP65	362*257*120MM
	100W	100~277V	13000LM	>70 (80)	IP65	362*257*120MM
	150W	100~277V	19500LM	>70 (80)	IP65	415*310*120MM
	200W	100~277V	26000LM	>70 (80)	IP65	487*362*120MM

